

GST0011




Code


Description


Inner


Outer Diameter


Lenght


Certification


Working Pressure


Burst Pressure


Working Temperature

No.	Material	mm	cm	Bar	Bar	C°		
GST-B11028	F3/8*F3/8	EPDM	Ø12, Ø13.8	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B11029	F3/8*10MM	EPDM	Ø12, Ø13.8	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B11030	F1/2*F1/2	EPDM	Ø12, Ø17.5	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B11031	F3/4*F3/4	EPDM	Ø12, Ø17.5	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B11032	F1/2*15MM	EPDM	Ø12, Ø17.5	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B11033	F3/4*22MM	EPDM	Ø12, Ø17.5	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B11034	F3/8*F3/8	EPDM	Ø12, Ø13.8	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B11035	F3/8*10MM	EPDM	Ø12, Ø13.8	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B11036	F1/2*F1/2	EPDM	Ø12, Ø17.5	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B11037	F3/4*F3/4	EPDM	Ø12, Ø17.5	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B11038	F1/2*15MM	EPDM	Ø12, Ø17.5	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B11039	F3/4*22MM	EPDM	Ø12, Ø17.5	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B11040	F1/2*F1/2	EPDM	Ø12	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B11041	F1/2*F3/8	EPDM	Ø12	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B11042	F3/8*F3/8	EPDM	Ø12	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B11043	F1/2*F1/2	EPDM	Ø13.8	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B11044	F1/2*F3/8	EPDM	Ø13.8	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B11045	F3/8*F3/8	EPDM	Ø13.8	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B11046	F1/2*F1/2	EPDM	Ø17.5	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B11047	F1/2*F3/4	EPDM	Ø17.5	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B11048	F3/4*F3/4	EPDM	Ø17.5	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C

Stainless Steel Braided Hose

BRAIDED FLEXIBLE HOSE

Stainless steel wire braided hose made of high quality 304 stainless steel wire braid, 304 stainless steel wires with high strength, corrosion resistance and other advantages.

After precision machining, with a neat appearance, do not jump wire, folding wire, broken wire, etc..


Two hose connection nuts made of high quality brass forging, rubber gaskets (seals) using high-quality NBR or EPDM, through a number of rigorous testing, the sealing performance.

Connecting nut with a variety of specifications, ease of installation and connection.

Inner tube made of high quality EPDM, PVC, PE-X, anti-aging, cold, high temperature, corrosion resistance is much higher than ordinary materials, preparation of the pipe material, the use of advanced technology, adding additives with rigorous scientific and controls to ensure that the environmental performance of non-toxic products.

After weaving through the outer layer, with the characteristics of high pressure, proof of.

Stainless Steel Braided Hose

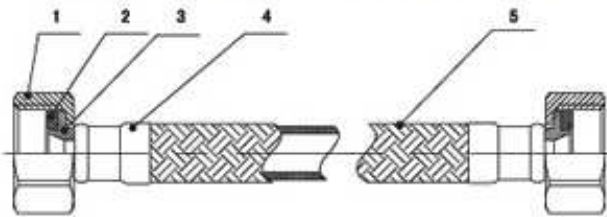

N°	Name	Material
1	Nuts	Brass
2	Washers	EPDM
3	Insert	Brass
4	Sleeves	Stainless Stell, Brass
5	Braided Hose	SS301, EPDM

