


## GST0012



Code	Description	Inner	Outer Diameter	Length	Certification	Working Pressure	Burst Pressure	Working Temperature
No.		Material	mm	cm		Bar	Bar	C°
GST-B12052	F1/2*F3/8	EPDM	Ø12, Ø13.8	15cm-200cm	<b>WRAS</b>	16bar	65 Bars	0°C +80°C
GST-B12053	F3/8*F3/8	EPDM	Ø12, Ø13.8	15cm-200cm	<b>WRAS</b>	16bar	65 Bars	0°C +80°C
GST-B12054	F1/2*F1/2	EPDM	Ø12, Ø17.5	15cm-200cm	<b>WRAS</b>	16bar	65 Bars	0°C +80°C
GST-B12055	F3/4*F3/4	EPDM	Ø12, Ø17.5	15cm-200cm	<b>WRAS</b>	16bar	65 Bars	0°C +80°C
GST-B12056	F1/2*F3/8	EPDM	Ø12, Ø13.8	15cm-200cm	<b>ACS</b>	16bar	65 Bars	0°C +80°C
GST-B12057	F3/8*F3/8	EPDM	Ø12, Ø13.8	15cm-200cm	<b>ACS</b>	16bar	65 Bars	0°C +80°C
GST-B12058	F1/2*F1/2	EPDM	Ø12, Ø17.5	15cm-200cm	<b>ACS</b>	16bar	65 Bars	0°C +80°C
GST-B12059	F3/4*F3/4	EPDM	Ø12, Ø17.5	15cm-200cm	<b>ACS</b>	16bar	65 Bars	0°C +80°C
GST-B12060	F1/2*F3/8	EPDM	Ø12, Ø13.8	15cm-200cm	<b>Watermark</b>	16bar	65 Bars	0°C +80°C
GST-B12061	F3/8*F3/8	EPDM	Ø12, Ø13.8	15cm-200cm	<b>Watermark</b>	16bar	65 Bars	0°C +80°C
GST-B12062	F1/2*F1/2	EPDM	Ø12, Ø17.5	15cm-200cm	<b>Watermark</b>	16bar	65 Bars	0°C +80°C
GST-B12063	F3/4*F3/4	EPDM	Ø12, Ø17.5	15cm-200cm	<b>Watermark</b>	16bar	65 Bars	0°C +80°C

# Stainless Steel Braided Hose

## BRAIDED FLEXIBLE HOSE

Stainless steel wire braided hose made of high quality 304 stainless steel wire braid, 304 stainless steel wires with high strength, corrosion resistance and other advantages.

After precision machining, with a neat appearance, do not jump wire, folding wire, broken wire, etc..


Two hose connection nuts made of high quality brass forging, rubber gaskets (seals) using high-quality NBR or EPDM, through a number of rigorous testing, the sealing performance.

Connecting nut with a variety of specifications, ease of installation and connection.

Inner tube made of high quality EPDM, PVC, PE-X, anti-aging, cold, high temperature, corrosion resistance is much higher than ordinary materials, preparation of the pipe material, the use of advanced technology, adding additives with rigorous scientific and controls to ensure that the environmental performance of non-toxic products.

After weaving through the outer layer, with the characteristics of high pressure, proof of.

### Stainless Steel Braided Hose

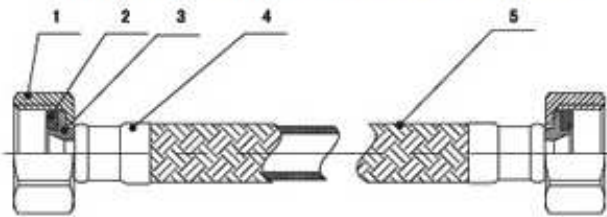

N°	Name	Material
1	Nuts	Brass
2	Washers	EPDM
3	Insert	Brass
4	Sleeves	Stainless Stell, Brass
5	Braided Hose	SS301, EPDM

