


GST0013



Code	Description	Inner	Outer Diameter	Lenght	Certification	Working Pressure	Burst Pressure	Working Temperature
No.		Material	mm	cm		Bar	Bar	C°
GST-B13067	F1/2*M3/8	EPDM	Ø12, Ø13.8	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B13068	F3/8*M3/8	EPDM	Ø12, Ø13.8	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B13069	F1/2*M1/2	EPDM	Ø12, Ø17.5	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B13070	F3/4*M1/2	EPDM	Ø12, Ø17.5	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B13071	F3/4*M3/4	EPDM	Ø12, Ø17.5	15cm-200cm	WRAS	16bar	65 Bars	0°C +80°C
GST-B13072	F1/2*M3/8	EPDM	Ø12, Ø13.8	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B13073	F3/8*M3/8	EPDM	Ø12, Ø13.8	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B13074	F1/2*M1/2	EPDM	Ø12, Ø17.5	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B13075	F3/4*M1/2	EPDM	Ø12, Ø17.5	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B13076	F3/4*M3/4	EPDM	Ø12, Ø17.5	15cm-200cm	ACS	16bar	65 Bars	0°C +80°C
GST-B13077	F1/2*M3/8	EPDM	Ø12, Ø13.8	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B13078	F1/2*M1/2	EPDM	Ø12, Ø17.5	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B13079	F3/4*M3/4	EPDM	Ø12, Ø17.5	15cm-200cm	Watermark	16bar	65 Bars	0°C +80°C
GST-B13080	F1/2*M3/8	EPDM	Ø12, Ø13.8	15cm-200cm	AENOR	16bar	65 Bars	0°C +80°C
GST-B13081	F3/8*M3/8	EPDM	Ø12, Ø13.8	15cm-200cm	AENOR	16bar	65 Bars	0°C +80°C
GST-B13082	F1/2*M1/2	EPDM	Ø12, Ø17.5	15cm-200cm	AENOR	16bar	65 Bars	0°C +80°C
GST-B13083	F3/4*M1/2	EPDM	Ø12, Ø17.5	15cm-200cm	AENOR	16bar	65 Bars	0°C +80°C
GST-B13084	F3/4*M3/4	EPDM	Ø12, Ø17.5	15cm-200cm	AENOR	16bar	65 Bars	0°C +80°C

Stainless Steel Braided Hose

BRAIDED FLEXIBLE HOSE

Stainless steel wire braided hose made of high quality 304 stainless steel wire braid, 304 stainless steel wires with high strength, corrosion resistance and other advantages.

After precision machining, with a neat appearance, do not jump wire, folding wire, broken wire, etc..


Two hose connection nuts made of high quality brass forging, rubber gaskets (seals) using high-quality NBR or EPDM, through a number of rigorous testing, the sealing performance.

Connecting nut with a variety of specifications, ease of installation and connection.

Inner tube made of high quality EPDM, PVC, PE-X, anti-aging, cold, high temperature, corrosion resistance is much higher than ordinary materials, preparation of the pipe material, the use of advanced technology, adding additives with rigorous scientific and controls to ensure that the environmental performance of non-toxic products.

After weaving through the outer layer, with the characteristics of high pressure, proof of.

Stainless Steel Braided Hose

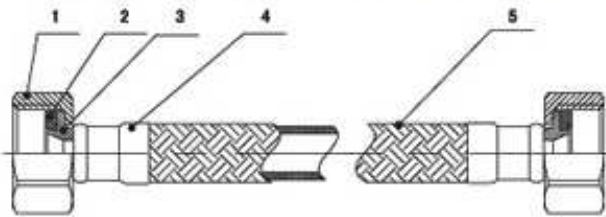

N°	Name	Material
1	Nuts	Brass
2	Washers	EPDM
3	Insert	Brass
4	Sleeves	Stainless Stell, Brass
5	Braided Hose	SS301, EPDM

